

A Numerical Study To Investigate Several Thermal Insulators To Choose The Most Suitable Ones For Thermal Insulation In Buildings

HasanQahtan Hussein¹, Abbas FadhilKhalaf², Ali K Jasim³

1 College of Engineering- Kerbala University-Iraq

2 College of Engineering- Kerbala University-Iraq

3 College of Engineering- Kerbala University-Iraq

Abstract

When designing buildings, reducing energy consumption is one of the most important things that designers focus on, and one of the most important solutions is the use of thermal insulation, and in this research, we study the use of several types of thermal insulation (air, Cellulose, Fibreglass, Mineral wool, polystyrene, and Polyurethane foam) to choose the most appropriate site when designing. A formalism for enthalpy-porosity (ANSYS/FLUENT16 software) is used to carry out the numerical analysis. From the results of this study all the heat insulators studied provide good insulation, but some of the insulators have properties that make it difficult to use like air. The rest of the insulators meet all the conditions that can be used as a heat insulator. (Polystyrene) is one of the most essential insulators available locally since it has all of the necessary qualities to be employed as a thermal insulator.. The application of thermal insulation in buildings saves energy as a result of reducing the use of refrigeration devices to provide comfortable conditions, which has a great impact on the environment.

Keywords:thermal insulation,buildings,double glass.

1. Introduction

Energy is an important component of daily life and plays a major role in developing all aspects of life. And the depletion of traditional fossil energy resources, and the associated challenges represented in the stability of supply and the increase in prices and their impact on the environment[1, 2].Currently, approximately 70% of the electricity produced in the world is generated using coal, natural gas, and petroleum products. Electricity generation is the largest contributor to global carbon emissions. In 2016, 39.5% of energy was used worldwide for heating and cooling buildings [3]. Thus, the focus is on the use of thermal insulation to reduce energy use. Energy use in the real estate sector accounts for a very large percentage of the total energy consumption in the world. As the annual energy consumption in the European Union and the United States in the construction sector represents 40% of the total amount of energy used in 2012 [4,5, 6,7, 8]. And energy consumption in China in the real estate sector in 2009 is about 33% of total energy consumption, and this percentage is expected to increase with the development of output in the construction sector [9].Energy consumption will increase by an estimated 56% by 2040. Most of this energy demand is met from fossil fuels, which will cause serious problems about the depletion of energy resources and the high impact of global warming[10].Some estimates indicate that the construction sector consumes about 40% of energy, 25% of water, and 40% of the world's resources [11, 12]. That is why the focus has been on the insulation properties of building envelopes through the use of insulation materials, which play a major role in energy consumption because it can lead to significant improvements in energy consumption, which are evident during not long [13, 14]. The researchers focused on developing several insulation materials for buildings to reduce energy consumption in the real estate sector. It has been found that thermal insulation materials can effectively improve the

thermal insulation performance of the real estate sector and reduce energy consumption [15, 16]. Thermal insulation in the building sector affects three areas: economic, environmental, and social [17]. The use of thermal insulation is one of the most effective means of energy conservation in the real estate sector. The thermal resistance provided by the thermal insulation increases with the increase in the thickness of the insulating layer and its thermal conductivity decreases. Whereas, insulation materials also play an important role in influencing other thermal properties such as diminishing factors, time delay, and peak transmission loads. Many types of insulation materials available differ in terms of thermal and many other properties, material properties as well as cost [18,19,20,21]. Thermal insulation materials have a significant impact on energy efficiency in the construction sector. The maintenance of a comfortable home temperature consumes a significant amount of energy (up to 30%). Many insulating materials are available, including Polyurethane foam (PUFs), expanded polystyrene foam (EPSFs), fiberglass, and mineral wool. PUFs are most likely due to their inexpensive cost, relatively high mechanical strength, and apparent low heat conductivity ($\lambda=0.03-0.04$ watts) / (MK). PUFs can also be customized to fulfill individual needs, with applications like as shock absorbers in vehicles, enclosures, and shoes. However, because of its great flammability, it is critical to improve fire safety. By trapping free radicals, halogen compounds enter the gaseous phase. Despite their effectiveness, they have been banned in large-scale regions and events because to major environmental concerns. Phosphorus/nitrogen-containing compounds, on the other hand, drew more attention due to their low toxicity. [22, 23,24]. To choose the appropriate insulation according to what is locally available, the most important of which are thermal conductivity, taking into account several things, weak perforation, adaptation to the construction site and durability, fire protection, smoke emission during the fire, mechanical strength, durability, freeze/thaw resistance, climatic ageing durability, waterresistance cycles, and costs. And environmental impact [25,26]. Heat losses from buildings occur through external walls, windows, ceilings, and floors, as well as by air leakage. Where are calculated the thermal conductivity resistance of the wall (R) and the thermal conductivity (k) so that the required thickness of the insulation (P) equals the thermal conductivity resistance of the wall multiplying by the thermal conductivity [27, 28]. In this research, the importance of using thermal insulation in buildings, and its effect on energy consumption, was studied, and several types of insulators were studied to choose the best in thermal insulation and the importance of this in reducing energy consumption. Where have been studied (air, Cellulose, Fibreglass, Mineral wool, polystyrene, and Polyurethane foam) to choose the most suitable for building insulation.

2. Numerical procedure

2.1 Physics models

In Fig. (1), the wall was studied using an insulating material installed in the middle of the wall, as the wall is made of bricks with a width of 10 cm, insulation of 5 cm, and bricks of 10 cm. From the outside, it is covered with cement with a width of 5 mm, and from the inside, it is covered with cement 5 mm and gypsum 5 mm.

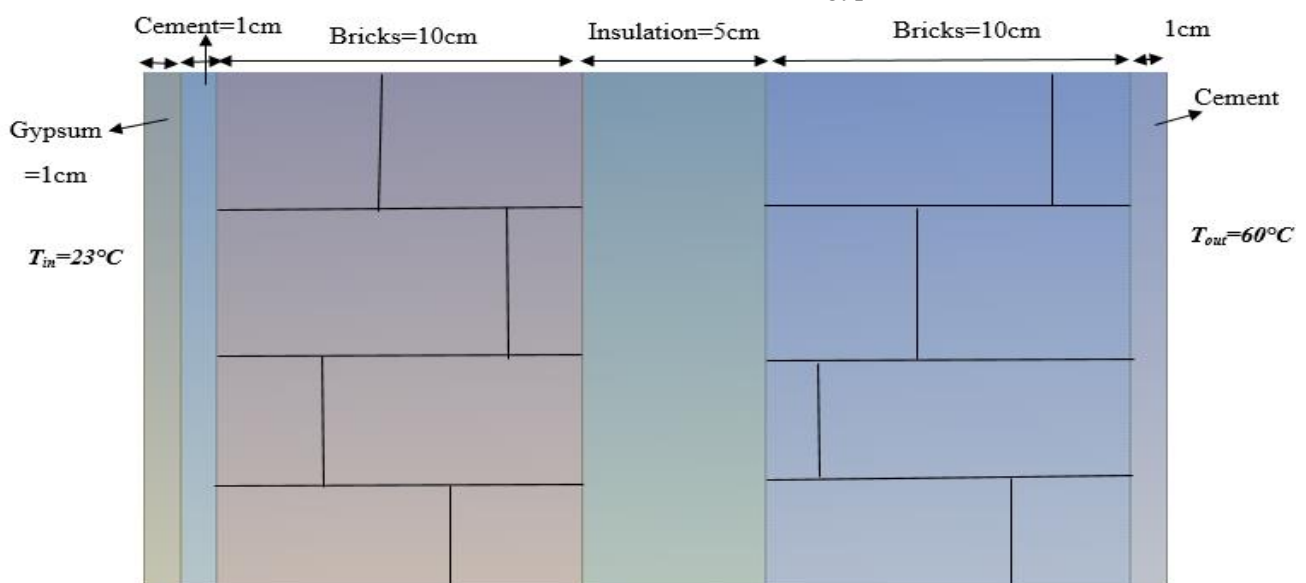


Fig. (1) Schematic diagram of the wall with thermal insulation to the middle of the wall.

2.2 Materials

The materials used in the wall are mainly bricks, and it is sheathed from the outside with cement and from the inside with cement and gypsum, in addition to the thermal insulation used in the study, which is Mineral wool, as well as the use of double-glassed deflated from the air. In Table (1) it shows the thermophysical proprietiesfor the materials used for the wall and the glass used in the windows in this numerical study.

Table (1) Thermophysical proprieties of the materials

Thermal properties	Bricks[29]	Cement[30]	Gypsum [31]	Mineral wool[32]	Air
Density [kg/m ³], ρ	1466	1730	1200	100	1.225
Specific Heat [J/kg K], C_p	800	920	950	840	1006
Thermal Conductivity [W / m K], k	0.67	0.33	0.35	0.04	0.024
	Fibreglass [33]	Polystyrene [34]	Polyurethane foam[35]	Cellulose[36]	
	300	25	900	60	
	1000	1500	2076	1600	
	0.067	0.035	0.048	0.04	

2.3Enthalpy–porosity method

The simulation of the heat transfer process of the wall was obtained by adopting the enthalpy–porosity method. The computational domain of the heat transfer divides the wall by the number of components of the wall. Where we notice that every part of the wall is clarified the heat transfer through it, which shows the temperatures inside the wall, which explains the importance of using insulation in buildings.

3.Results and discussion

In this paper, we study several types of insulators to choose the best, most appropriate, most useful, and least expensive, which will give better results and help reduce energy use and create comfortable conditions for building occupants. where it is the study (air, Cellulose, Fibreglass, Mineral wool, polystyrene, and Polyurethane foam) where it is will explain the study of each thermal insulator to demonstrate the transfer of heat through the insulator and to choose the best one that is available locally and has the required specifications when used in thermal insulation.

3-1 Air

The study of the use of air in thermal insulation to clarify the importance of its use, but it cannot be applied due to the difficulty of fixing the wall, and therefore we are trying, through subsequent studies, to find a solution through which the air can be used as thermal insulation as it is in the double glass discharger from of the air. In Fig. (2), noted the slow heat transfer through the thermal insulation, which has a great effect to maintain comfortable conditions in buildings with the lowest energy consumption.

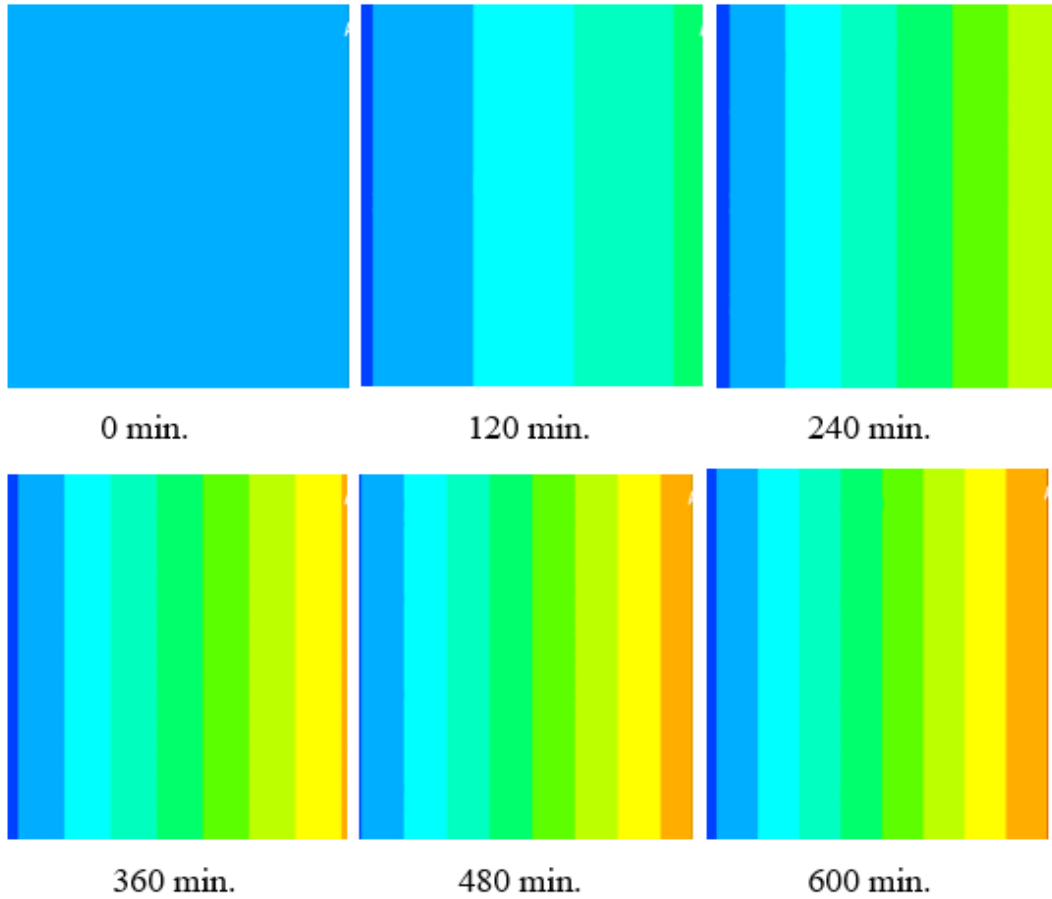


Fig. (2) Heat transfer stages inside the thermal insulation (air).

3-2 Cellulose

The use of thermal insulation (Cellulose) is considered an environmentally friendly insulator, as it is made from paper waste and materials are added to prevent burning, but this type of insulator does not withstand strong shocks. In Fig. (3), it is noted that the slow transfer of heat through thermal insulation, which has a great effect in maintaining comfortable temperatures inside buildings, has a great impact on the environment as a result of reducing energy consumption

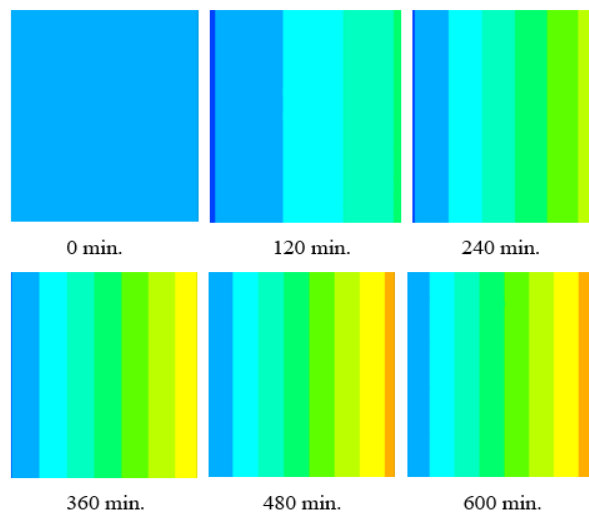


Fig. (3) Heat transfer stages inside the thermal insulation (Cellulose).

3-3 Fibreglass

The use of thermal insulation (Fibreglass) When compared to other insulation solutions, this is usually the most cost-effective option. The fibreglass is able to limit heat transfer because of the way it is created, by effectively weaving thin strands of glass into an insulating substance. It is critical to wear the appropriate safety equipment when installing fibreglass, as powdered glass and fine shards of glass can cause damage to the eyes, lungs, and skin.. It can be shaped easily using casting processes. In Figure (4) it is noted that the slow transfer of heat through thermal insulation, which has the effect of reducing energy consumption in addition to providing comfortable conditions for building occupants.

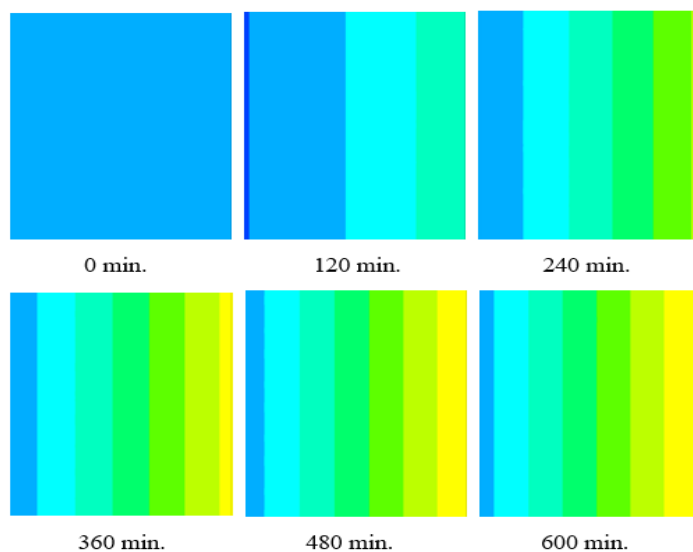


Fig. (4) Heat transfer stages inside the thermal insulation (Fibreglass).

3-4 Mineral wool

Thermal insulation (Mineral wool) rock wool fibres are made from either natural volcanic rocks or those that have been melted in special furnaces at temperatures above 1500 degrees Celsius, after which the flexible and high-temperature fibers are woven.. Then the fibres are collected and processed on production lines to create various shapes and products from rock wool, each product of different thicknesses and densities. Rockwool is a highly efficient insulation material used in most known applications that require thermal or acoustic insulation, thanks to its very low thermal conductivity and melting temperature. Very high performance rock wool against fire and burning materials rock wool does not harm the skin of the body and does not cause irritation. This product is highly compatible with all materials used in construction and industry. In Fig. (5), the heat transfer is observed through the thermal insulation, which has a great effect on the transfer of heat into the building and thus provides comfortable conditions and reduces energy consumption.

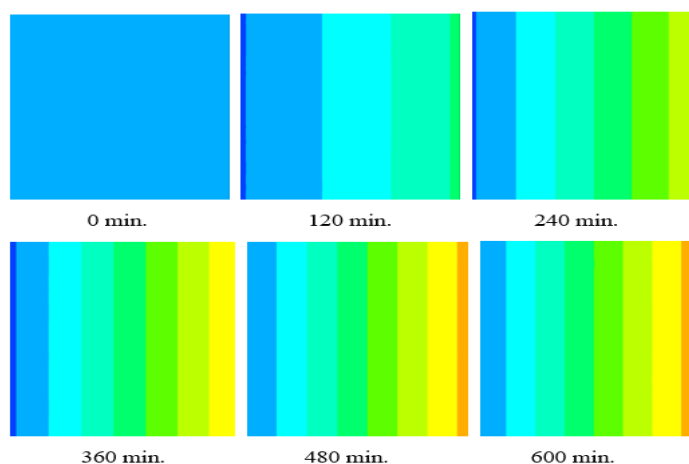


Fig. (5) Heat transfer stages inside the thermal insulation (Mineral wool).

3.5 Polystyrene

Thermal insulation (polystyrene) is a water-resistant thermoplastic foam that is a good sound and heat insulator. Expanded (EPS) and extruded (XEPS), often known as Styrofoam, are the two forms. No other type of insulation has the same smooth surface as polystyrene insulation. It can be found in both residential and commercial structures. Insulation made of polystyrene is extremely durable.. The foam is usually created or cut into blocks, which is ideal for wall insulation. In Figure (6), heat transfer is observed through thermal insulation, which has a significant impact on energy consumption and reduces the impact on the environment, which provides comfortable conditions inside buildings.

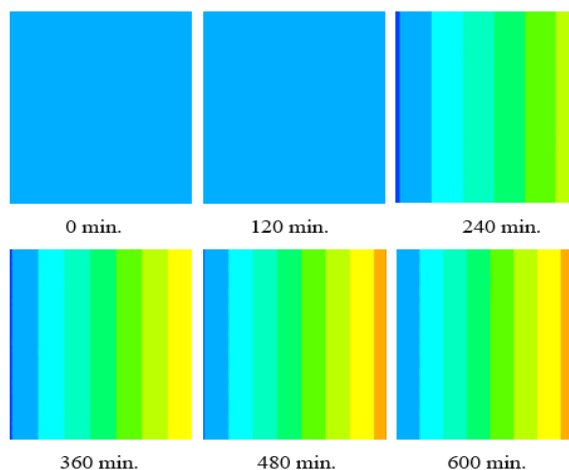


Fig. (6) Heat transfer stages inside the thermal insulation (Polystyrene).

3.6 Polyurethane foam

Thermal insulation (Polyurethane foam) To make polyurethane foam, chemicals are mixed and reacted to create a foam. The ingredients that are being mixed and reacting react quickly, expanding on contact to form a foam that insulates and softens the air while also functioning as a moisture barrier. Properly deployed insulation material can be part of a system designed to protect against moisture, providing the advantage of reducing the chance of harmful mould, mildew and wood damage. Spray foam insulation is often used to reduce noise. Foam insulation acts as a barrier to airborne sounds, and reduces the transmission of airborne sound through the building's roof, floor and walls compared to a non-insulated structure. In Figure (7) it is noted that the slow transfer of heat through thermal insulation, which has the effect of reducing energy consumption in addition to providing comfortable conditions for building occupants.

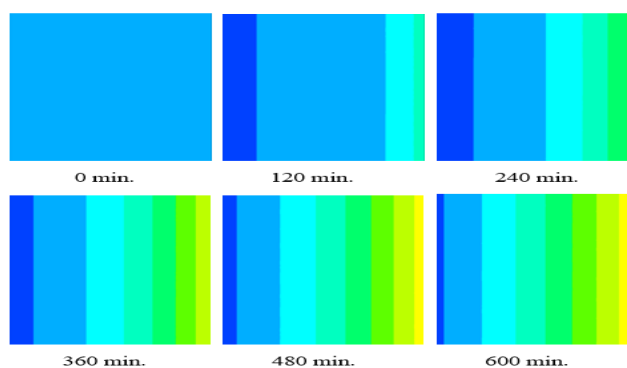


Fig. (7) Heat transfer stages inside the thermal insulation (Polyurethane foam).

4. Conclusions

In this paper, a numerical study of several types of thermal insulators was carried out to choose the best insulation, which has several factors, the most important of which are (low thermal conductivity and does not burn, expand, rust or fade, excellent resistance to high strong pressure, water resistance, moisture resistance, light weight, ease of use, excellent stability and Corrosion resistance and good environmental performance as well as sound insulation). Note that all the insulators that have been studied provide good thermal insulation, but the difference in some properties of the insulators makes some better when used. For example, the air is a good insulator, but you do not use it due to the difficulty of installing the wall. One of the insulators available locally, which has all the properties insulation materials is polystyrene at reasonable prices. Therefore, it can be used, which will save a lot of energy as a result of reducing the use of high-capacity cooling devices and provides comfortable conditions for building occupants. It reduces the environmental impact and reduces the material costs due to high energy consumption.

References

- [1] S. Guven, "Calculation of optimum insulation thickness of external walls in residential buildings by using exergetic life cycle cost assessment method: Case study for Turkey," *Environ. Prog. Sustain. Energy*, vol. 38, no. 6, pp. 1–10, 2019, doi: 10.1002/ep.13232.
- [2] N. S. Dhaidan and A. F. Khalaf, "Experimental evaluation of the melting behaviours of paraffin within a hemicylindrical storage cell," *Int. Commun. Heat Mass Transf.*, vol. 111, p. 104476, 2020, doi: 10.1016/j.icheatmasstransfer.2020.104476.
- [3] T. Gao, L. I. C. Sandberg, and B. P. Jelle, "Nano insulation materials: Synthesis and life cycle assessment," *Procedia CIRP*, vol. 15, pp. 490–495, 2014, doi: 10.1016/j.procir.2014.06.041.
- [4] X. Cao, X. Dai, and J. Liu, "Building energy-consumption status worldwide and the state-of-the-art technologies for zero-energy buildings during the past decade," *Energy Build.*, vol. 128, no. June, pp. 198–213, 2016, doi: 10.1016/j.enbuild.2016.06.089.
- [5] G. H. Lee, B. K. Park, and W. Il Lee, "Microstructure and property characterization of flexible syntactic foam for insulation material via mold casting," *Int. J. Precis. Eng. Manuf. - Green Technol.*, vol. 4, no. 2, pp. 169–176, 2017, doi: 10.1007/s40684-017-0021-2.
- [6] M. Morsy, M. Fahmy, H. AbdElshakour, and A. M. Belal, "Effect of Thermal Insulation on Building Thermal Comfort and Energy Consumption in Egypt," *J. Adv. Res. Appl. Mech. J. homepage*, vol. 43, no. January 2018, pp. 8–19, 2018, [Online]. Available: www.akademiabaru.com/aram.html.
- [7] G. Leng et al., "Preparation and properties of polystyrene/silica fibres flexible thermal insulation materials by centrifugal spinning," *Polymer (Guildf.)*, vol. 185, 2019, doi: 10.1016/j.polymer.2019.121964.
- [8] X. Xue, H. Wu, X. Zhang, J. Dai, and C. Su, "Measuring energy consumption efficiency of the construction industry: The case of China," *J. Clean. Prod.*, vol. 107, pp. 509–515, 2015, doi: 10.1016/j.jclepro.2014.04.082.
- [9] M. K. Akyüz, Ö. Altuntaş, and M. Z. Söğüt, "Economic and environmental optimization of an airport terminal building's wall and roof insulation, *Sustain*" vol. 9, no. 10, 2017, doi: 10.3390/su9101849.
- [10] B. Abu-Jdayil, A. H. Mourad, W. Hittini, M. Hassan, and S. Hameedi, "Traditional, state-of-the-art and renewable thermal building insulation materials: An overview," *Constr. Build. Mater.* vol. 214, pp. 709–735, 2019, doi: 10.1016/j.conbuildmat.2019.04.102.
- [11] J. Zhao et al., "Development of high thermal insulation and compressive strength BPP foams using mold-opening foam injection molding with in-situ fibrillated PTFE fibers," *Eur. Polym. J.*, vol. 98, pp. 1–10, 2018, doi: 10.1016/j.eurpolymj.2017.11.001.
- [12] G. F. García Sánchez, R. E. Guzmán Lopez, A. M. Restrepo Osorio, and E. H. Arroyo, "Fique as thermal insulation morphologic and thermal characterization of fique fibers," *Cogent Eng.*, vol. 6, no. 1, pp. 1–11, 2019, doi: 10.1080/23311916.2019.1579427.
- [13] F. Asdrubali, F. D'Alessandro, and S. Schiavoni, "A review of unconventional sustainable building insulation materials," *Sustain. Mater. Technol.*, vol. 4, pp. 1–17, 2015, doi: 10.1016/j.susmat.2015.05.002.

- [14] J. Nyers, L. Kajtar, S. Tomić, and A. Nyers, "Investment-savings method for energy-economic optimization of external wall thermal insulation thickness," *Energy Build.*, vol. 86, pp. 268–274, 2015, doi: 10.1016/j.enbuild.2014.10.023.
- [15] A. M. Papadopoulos, "State of the art in thermal insulation materials and aims for future developments," *Energy Build.*, vol. 37, no. 1, pp. 77–86, 2005, doi: 10.1016/j.enbuild.2004.05.006.
- [16] M. S. Al-Homoud, "Performance characteristics and practical applications of common building thermal insulation materials," *Build. Environ.* vol. 40, no. 3, pp. 353–366, 2005, doi: 10.1016/j.buildenv.2004.05.013.
- [17] J. Adamczyk and R. Dylewski, "The impact of thermal insulation investments on sustainability in the construction sector," *Renew. Sustain. Energy Rev.*, vol. 80, no. December 2016, pp. 421–429, 2017, doi: 10.1016/j.rser.2017.05.173.
- [18] S. A. Al-Ajlan, "Measurements of thermal properties of insulation materials by using transient plane source technique," *Appl. Therm. Eng.*, vol. 26, no. 17–18, pp. 2184–2191, 2006, doi: 10.1016/j.applthermaleng.2006.04.006.
- [19] R. Dylewski and J. Adamczyk, "Economic and environmental benefits of thermal insulation of building external walls," *Build. Environ.* vol. 46, no. 12, pp. 2615–2623, 2011, doi: 10.1016/j.buildenv.2011.06.023.
- [20] A. Abdou and I. Budaiwi, "The variation of thermal conductivity of fibrous insulation materials under different levels of moisture content," *Constr. Build. Mater.* vol. 43, pp. 533–544, 2013, doi: 10.1016/j.conbuildmat.2013.02.058.
- [21] H. Huang et al., "Optimum insulation thicknesses and energy conservation of building thermal insulation materials in Chinese zone of humid subtropical climate," *Sustain. Cities Soc.*, vol. 52, no. May 2019, p. 101840, 2020, doi: 10.1016/j.scs.2019.101840.
- [22] Z. J. Cao, W. Liao, S. X. Wang, H. B. Zhao, and Y. Z. Wang, "Polyurethane foams with functionalized graphene towards high fire-resistance, low smoke release, superior thermal insulation," *Chem. Eng. J.*, vol. 361, no. December 2018, pp. 1245–1254, 2019, doi: 10.1016/j.cej.2018.12.176.
- [23] A. Curado and V. P. de Freitas, "Influence of thermal insulation of facades on the performance of retrofitted social housing buildings in Southern European countries," *Sustain. Cities Soc.*, vol. 48, no. April, p. 101534, 2019, doi: 10.1016/j.scs.2019.101534.
- [24] H. Choe, Y. Choi, and J. H. Kim, "Threshold cell diameter for high thermal insulation of water-blown rigid polyurethane foams," *J. Ind. Eng. Chem.*, vol. 73, pp. 344–350, 2019, doi: 10.1016/j.jiec.2019.02.003.
- [25] B. P. Jelle, "Traditional, state-of-the-art and future thermal building insulation materials and solutions - Properties, requirements and possibilities," *Energy Build.*, vol. 43, no. 10, pp. 2549–2563, 2011, doi: 10.1016/j.enbuild.2011.05.015.
- [26] B. C. Roberts, M. E. Webber, and O. A. Ezekoye, "Development of a multi-objective optimization tool for selecting thermal insulation materials in sustainable designs," *Energy Build.*, vol. 105, pp. 358–367, 2015, doi: 10.1016/j.enbuild.2015.07.063.
- [27] K. Çomaklı and B. Yüksel, "Environmental impact of thermal insulation thickness in buildings," *Appl. Therm. Eng.*, vol. 24, no. 5–6, pp. 933–940, 2004, doi: 10.1016/j.applthermaleng.2003.10.020.
- [28] Ö. A. Dombaycı, M. Gölcü, and Y. Pancar, "Optimization of insulation thickness for external walls using different energy-sources," *Appl. Energy*, vol. 83, no. 9, pp. 921–928, 2006, doi: 10.1016/j.apenergy.2005.10.006.
- [29] K. S. Shibib, H. I. Qatta, and M. S. Hamza, "Enhancement in thermal and mechanical properties of bricks," *Therm. Sci.*, vol. 17, no. 4, pp. 1119–1123, 2013, doi: 10.2298/TSCII10610043S.
- [30] C. Buratti, E. Moretti, E. Belloni, and F. Agosti, "Development of innovative aerogel based plasters: Preliminary thermal and acoustic performance evaluation," *Sustain.*, vol. 6, no. 9, pp. 5839–5852, 2014, doi: 10.3390/su6095839.
- [31] Y. Xu and D. D. L. Chung, "Effect of sand addition on the specific heat and thermal conductivity of cement," *Cem. Concr. Res.*, vol. 30, no. 1, pp. 59–61, 2000, doi: 10.1016/S0008-8846(99)00206-9.

- [32] M. Jiříčková, Z. Pavlík, L. Fiala, and R. Černý, “Thermal conductivity of mineral wool materials partially saturated by water,” *Int. J. Thermophys.*, vol. 27, no. 4, pp. 1214–1227, 2006, doi: 10.1007/s10765-006-0076-8.
- [33] D. Tsalagkas, Z. Börcsök, and Z. Pásztor, “Thermal, physical and mechanical properties of surface overlaid bark-based insulation panels,” *Eur. J. Wood Wood Prod.*, vol. 77, no. 5, pp. 721–730, 2019, doi: 10.1007/s00107-019-01436-5.
- [34] Á. Lakatos and F. Kalmár, “Investigation of thickness and density dependence of thermal conductivity of expanded polystyrene insulation materials,” *Mater. Struct. Constr.*, vol. 46, no. 7, pp. 1101–1105, 2013, doi: 10.1617/s11527-012-9956-5.
- [35] A. Yasemin, M. Doğan, and E. Bayramlı, “The effect of red phosphorus on the fire properties of intumescent pine wood flour – LDPE composites Yasemin,” *Finnish-Swedish Flame Days 2009*, no. August 2008, p. 4B, 2009, doi: 10.1002/fam.
- [36] P. Lopez Hurtado, A. Rouilly, V. Vandenbossche, and C. Raynaud, “A review on the properties of cellulose fibre insulation,” *Build. Environ.* vol. 96, pp. 170–177, 2016, doi: 10.1016/j.buildenv.2015.09.031.