

Magnetohydrodynamic(MHD)Two-phase Fluid Flow and Heat Transfer Problem in a Horizontal Channel in Presence of Uniform Magnetic Field

Mrinmoy Goswami

Research Scholar, Department of Mathematics, Kaziranga University, Jorhat, Assam, India

Dr.Krishna Gopal Singha*

Department of Mathematics, Pragma Academy Junior College, Jorhat, Assam, India

Dr.Amarjyoti Goswami

Department of Electronics and Communication Engineering, Kaziranga University, Jorhat, Assam, India

Abstract A theoretical analysis of two-phase flow and heat transfer in a horizontal channel in the presence of an inclined magnetic field has been investigated in this paper. The inclined magnetic field is a strong magnetic field and the induced magnetic field is produced along the flow direction. The fluids in both phases were incompressible and the flow was assumed to be steady, one-dimensional and fully developed. Further it is also assumed that the two fluids have different viscosities and thermal conductivities. In this paper, we have investigated the upper phase of the two fluids which is assumed to be electrically conducting and that of the lower phase is electrically non-conducting. The transport properties of the two fluids were taken to be constant and equal temperature. The differential equations governing the flow are non-dimensionalised and solved analytically with appropriate boundary conditions. The computed results of velocity distributions, induced magnetic field strength and the temperature distributions are depicted graphically for distances from the fixed horizontal plates and for different angle of inclinations.

Keywords: Induced magnetic field, horizontal channel, incompressible, electrically conducting fluid, Hartmann number
Mathematics Subject Classification 2000 (MSC2000) 76W05

1. Introduction

An electrical conducting fluid flows past a magnetic field, an electric field and consequently an electric current is induced. In turn the current interacts with the magnetic field to produce a body force on the fluid. Heat transfer in developing magnetohydrodynamic Poiseuille flow and variable transport properties carried out by Alireza, S. and Sahai, V.[1]

The magnetohydrodynamic (MHD) heat transfer in a two-phase flow with the fluid in one phase being electrically conducting has been studied by Lohrasbi and Sahai [2]. The flow through the generator channel has two regions: (a) gaseous suspension region containing slag and seed particles and (b) liquid phase consisting of condensed slag. Both phases are electrically conducting and have variable transport properties.

The coal-fire MHD generator channel is subjected to an unusually severe thermal environment. Postlethwaite and Sluyter [3] present an overview of the heat transfer problems associated with a MHD generator. The fluid mechanics and the heat transfer characteristics of generator channel are significantly influenced by the presence of magnetic field. The slag layers in the walls of the channel complicate the problem. Further the thermal energy is supplied to the conducting fluid through Ohmic heating. Thus the temperature field in an electrically conducting fluid in presence of a magnetic field differs from that in a non-conducting fluid. Malashetty and Leela [4] have studied the problem of magnetohydrodynamic flow and heat transfer in a horizontal channel in a two-phase flow. He observed that in case of open circuit problem for negative values of the electric load

parameter R_e , the effect of increasing the Hartmann number M is to accelerate the velocity and to increase the temperature field in contrast to the short circuit case. Recently there have been some theoretical and experimental works on the stratified laminar flow of two immiscible liquids in a horizontal pipe. The interest in these types of problems stems from the possibility of reducing the power required to pumping oil in a pipeline by suitable addition of water. Hartmann flow of a conducting fluid in a channel between two horizontal insulating plates of infinite extent with a layer of non-conducting fluid between upper channel wall and the conducting fluid has been studied by Shail [5]. He found that an increase of the order of 30% can be obtained in the flow rate of the conducting fluid for suitable ratios of the depths and viscosities of the two fluids and realistic value of the Hartmann number. Setayeshand Sahai [6] analyzed the magnetohydrodynamic heat transfer problem with variable transport properties. Malashetty and Umavathi [7] have studied the Two-Phase Magnetohydrodynamic flow and heat transfer in an inclined channel in which one phase being electrically conducting. He assumed that the transport properties of both fluids are constant. It is found that the velocity and temperature can be increased or decreased with suitable values of the ratios of viscosities, thermal conductivities, the heights and the angle of inclination. Singha and Deka [8] studied the laminar convection flow of a viscous electrically conducting incompressible fluid between two heated vertical parallel plates in presence of a uniform inclined magnetic field. It is found that with the increase of angle of inclination, velocity increases with different magnetic field strength. Further it is also observed that with the bigger strength of magnetic field variation of velocity with angle of inclination is bigger. So it is concluding that with large magnetic field strength if inclination of field is slightly changed we can expect large change in fluid velocity. The two-phase problem of magnetohydrodynamic flow and heat transfer in a parallel-plate channel is studied analytically by Singha and Deka [10]. It is observed that in case of open circuit problem for negative values of the electric load parameter R_e , the effect of increasing the Hartmann number M is to accelerate the velocity and is to increase the temperature in contrast to the short case. P. Sri Ramachandra Murthy and G.Singh [11] investigated on hydromagnetic steady flow of viscous incompressible fluid between two parallel infinite plates under the influence of inclined magnetic field. Balaji Prakash [12] have done a detailed analysis on MHD Two-Fluid Flow and Heat Transfer between Two Inclined Parallel Plates in a Rotating System. Recently Hasan Nihal Zaidi, Naseem Ahmad [13] have studied MHD Convection Flow of Two Immiscible Fluids in an Inclined Channel with Heat Generation / Absorption. Navneet Kumar Singh, Vinod Kumar and Gaurav Kumar Sharma [14] investigated the effect of inclined magnetic field on unsteady flow past an moving vertical plate with variable temperature. The results are discussed with the help of graphs and table. The effect of inclined magnetic field on two infinite parallel plates having porous medium with heat and mass transfer has been studied by Rishab Richard Hanvey, Rajeev Kumar Khare and Ajit Paul [15]. Aruna Sharma and A.V .Dubewar [16] investigates the MHD flow between two parallel infinite plates. He considered the upper plate is moving with constant velocity and the lower plate is held stationary and a constant pressure gradient is applied to the system which is under the influence of an inclined magnetic field. Very recently Thadakamalla Srinivasulu and B. Shankar Goud [17] studied the inclined magnetic field effect on Williamson fluid over a stretching sheet in the presence of nano- particles with convective boundary conditions. The MHD boundary layer flow of a viscous incompressible fluid over an exponentially stretching sheet with an inclined magnetic field in presence of thermal radiation was analyzed by R A Mutegi, John Achola Okello and M Kimathi [18]

In the present paper, we have studied the Magnetohydrodynamics two-phase flow and heat transfer problem in a horizontal channel and it is considered in presence of a uniform inclined magnetic field. The fluids in the two-phase were assumed to be immiscible, incompressible, steady, one-dimensional and fully developed. Further it is also assumed that the two fluids have different viscosities and thermal conductivities. In this problem, we have investigated the upper phase of the two fluids which is assumed to be electrically conducting and that of the lower phase is electrically non-conducting. The transport properties of the two fluids were taken to be constant and equal temperature. The analytical solutions for velocities, induced magnetic field and temperature distributions are obtained and are computed numerically for different heights and viscosity ratios for two fluids and for two values of electric load parameter R_e . The computed results of velocity distributions, induced magnetic field strength and the temperature distributions are plotted distances from the fixed horizontal plates and for different angle of inclinations. Analytical solutions for velocity, induced field and the temperature

distributions are obtained; skin frictional factors are computed for different angle of inclinations and for different magnetic field strengths.

Our study is motivated by the work of Singha and Deka [8] who investigated one- phase flow of a viscous electrically conducting incompressible fluid between two heated vertical parallel plates in presence of a uniform inclined magnetic field. In the present work, we have studied two-phase MHD flow and heat transfer in an inclined magnetic field. In our studies it has found that the volumetric flow rate in a channel may be controlled by the orientation of applied magnetic field.

2. Formulation of the problem

The physical model shown in Fig.1, consists of two infinite parallel plates extending in the X and z -direction. The region $0 \leq y \leq h_1$, is occupied by a fluid of viscosity μ_1 , electrical conductivity σ_1 , and thermal conductivity k_1 and the region $-h_2 \leq y \leq 0$, is occupied by a layer of different (immiscible) fluid of viscosity μ_2 and thermal conductivity k_2 . The transport properties of both fluids are assumed to be constant. The fluid flows in the X direction. A uniform magnetic field of strength B_0 is applied in the direction making an angle θ to the vertical line which in turn another magnetic field $B_x(y)$ along the lines of motion.

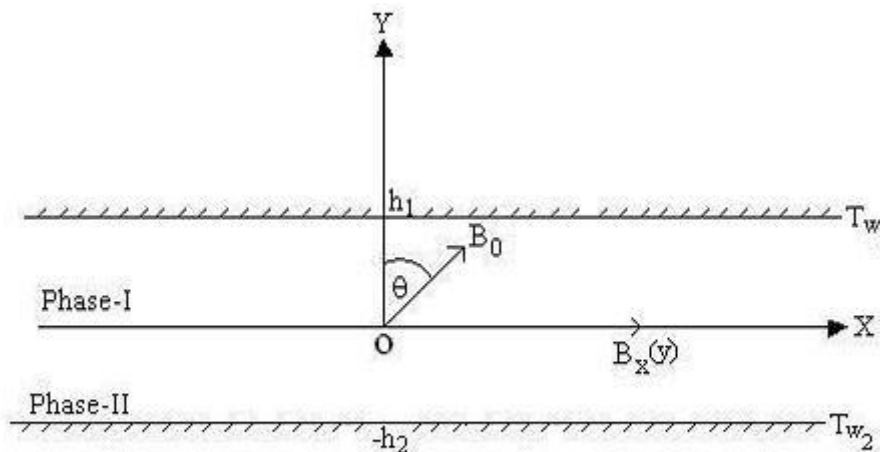


Fig 1: Physical Configuration

The fluid velocity and the magnetic field distributions are

$$\vec{V} = [u(y), 0, 0] \text{ and}$$

$$\vec{B} = \left[B_x(y) + B_0 \cos\left(\frac{\pi}{2} - \theta\right), B_0 \cos\theta, 0 \right]$$

$$= [B_x(y) + B_0 \sin\theta, B_0 \cos\theta, 0]$$

$$= [B_x(y) + B_0 \sqrt{1 - \lambda^2}, B_0 \lambda, 0]$$

where $\cos\theta = \lambda$. The two bounding walls are maintained at constant temperature T_w .

The flow is assumed to be steady, laminar, incompressible and fully developed. The flow of both phases is

assumed to be at a constant pressure gradient $P = -\frac{\partial p}{\partial x}$.

Under these assumptions as stated above, the governing equation of motion, magnetic field and equation of energy for the two phases are

$$\nabla \cdot \vec{V} = 0. \quad (1)$$

$$\frac{\partial \vec{V}}{\partial t} + (\vec{V} \cdot \nabla) \vec{V} = -\left(\frac{1}{\rho}\right) \nabla p + \mu \nabla^2 \vec{V} + \frac{1}{\rho} (\vec{J} \times \vec{B}) + \vec{Z} \quad (2)$$

$$\frac{\partial \vec{B}}{\partial t} - \nabla \times (\vec{V} \times \vec{B}) - \left(\frac{1}{\sigma \mu_e}\right) \nabla^2 \vec{B} = 0 \quad (3)$$

$$\rho c_p \left(\frac{\partial T}{\partial t} + \vec{V} \cdot \nabla T\right) = \kappa \nabla^2 T + \rho \nu \Phi + \frac{J^2}{\sigma} \quad (4)$$

Here Φ represents the dissipation function given by

$$\Phi = 2 \left[\left(\frac{\partial u}{\partial x}\right)^2 + \left(\frac{\partial v}{\partial y}\right)^2 + \left(\frac{\partial w}{\partial z}\right)^2 \right] + \left(\frac{\partial v}{\partial x} + \frac{\partial u}{\partial y}\right)^2 + \left(\frac{\partial w}{\partial y} + \frac{\partial u}{\partial z}\right)^2 + \left(\frac{\partial u}{\partial z} + \frac{\partial w}{\partial x}\right)^2 - \frac{3}{2} \left(\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z}\right)^2$$

and the third term in the right hand side of equation (2) is the magnetic body force and \vec{J} is the current density due to the magnetic field defined by

$$\vec{J} = \sigma (\vec{E} + \vec{V} \times \vec{B}) \quad (5)$$

\vec{Z} is the force due to buoyancy

$$\vec{Z} = \beta g (T_0 - T) \quad (6)$$

The gravitational body force \vec{Z} has been neglected in the equation (2).

Using the velocity and magnetic field distribution as stated above, the equations (1) to (4) are as follows:

The equation of motion and energy for the two-phases reduces to

$$\frac{1}{\rho} P + \mu \frac{d^2 u}{dy^2} - \frac{\sigma}{\rho} (E_z + u B_0 \lambda) B_0 \lambda = 0. \quad (7)$$

$$B_0 \lambda \frac{du}{dy} + \left(\frac{1}{\sigma \mu_e} \right) \frac{d^2 B_x}{dy^2} = 0. \quad (8)$$

$$\rho c_p u \frac{\partial T}{\partial x} = \kappa \frac{\partial^2 T}{\partial y^2} + \mu \left(\frac{\partial u}{\partial y} \right)^2 + \sigma (E_z + u B_0 \lambda)^2. \quad (9)$$

3. Boundary Conditions

The fluid and thermometric boundary conditions are unchanged by the addition of electromagnetic fields. The no slip condition requires that the velocity must vanish at the wall boundaries. In addition, the fluid velocity, shearing stress, temperature and heat flux must be continuous across the interface $y = 0$. Boundary and interface conditions on u_1 , u_2 and B_x are

$$u_1(h_1) = 0, \quad u_2(-h_2) = 0, \quad u_1(0) = u_2(0), \quad \mu_1 \frac{du_1}{dy_1} = \mu_2 \frac{du_2}{dy_2} \quad \text{at } y=0$$

$$B_x = 0 \quad \text{at } y = \pm h \quad (10)$$

If the walls are maintained at constant temperatures the boundary conditions on T_1 and T_2 are given by

$$T_1(h_1) = T_{w_1}, \quad T_2(-h_2) = T_{w_2}, \quad T_1(0) = T_2(0),$$

$$k_1 \frac{dT_1}{dy_1} = k_2 \frac{dT_2}{dy_2} \quad \text{at } y=0 \quad (11)$$

Velocity and magnetic field distributions

The governing equation for the velocity u_1 of phase-I can be written as

$$\frac{1}{\rho} P + \mu_1 \frac{d^2 u_1}{dy_1^2} - \frac{1}{\rho} \sigma_1 (E_z + u_1 B_0 \lambda) B_0 \lambda = 0 \quad (12)$$

The equation governing the velocity u_2 of the non-conducting lower phase-II may be obtained by setting $\sigma_2 = 0$ in equation (7) and is given by

$$\frac{d^2 u_2}{dy_2^2} = -\frac{1}{\rho} \left(\frac{P}{\mu_2} \right) \quad (13)$$

The equation governing the magnetic field of the conducting upper phase-I can be written as

$$B_0 \lambda \frac{du_1}{dy_1} + \left(\frac{1}{\sigma \mu_e} \right) \frac{d^2 B_x}{dy_1^2} = 0 \quad (14)$$

It is convenient to non-dimensionalize the above equations the following transformations will be used here:

$$u_1^* = \left(\frac{u_1}{u_1} \right), y_1^* = \frac{y_1}{h_1}, u_2^* = \left(\frac{u_2}{u_1} \right), y_2^* = \frac{y_2}{h_2},$$

$$G = \frac{P}{(\mu_1 \bar{u}_1 / h_1^2)}, R_e = \frac{E_z}{u_1 B_0}, b = \frac{B_x}{B_0} \quad (15)$$

Equations (12)-(14) becomes respectively,

$$G + \frac{d^2 u_1}{dy_1^2} - M^2 (R_e + u_1 \lambda) \lambda = 0 \quad (16)$$

$$\left(\frac{G \alpha}{\beta^2} \right) + \frac{d^2 u_2}{dy_2^2} = 0 \quad (17)$$

$$\frac{d^2 b}{dy_1^2} + \lambda R_m \frac{du_1}{dy_1} = 0 \quad (18)$$

(The subscripts 1 and 2 refer to the upper and lower phases respectively).

Where M is the Hartmann number, which is the measure of the strength of the applied magnetic field,

$$M = B_0 h_1 \sqrt{\frac{\sigma_1}{\mu_1}}$$

R_m is the magnetic Reynolds number, $R_m = \bar{u}_1 h_1 \sigma_1 \mu_e$

R_e is the electric field loading parameter.

α is the ratio of the viscosities of the two fluids, $\alpha = \frac{\mu_1}{\mu_2}$.

β is the ratio of the height of the two fluids, $\beta = \frac{h_1}{h_2}$.

G is the non-dimensional pressure gradient.

The boundary conditions (10) reduces to

$$\begin{aligned}
 u_1(+1) &= 0, & u_2(-1) &= 0, & u_1(0) &= u_2(0), \\
 \frac{du_1}{dy_1} &= \left(\frac{\beta}{\alpha}\right) \frac{du_2}{dy_2} \text{ at } y = 0 \\
 b &= 0 \text{ at } y = \pm 1
 \end{aligned}
 \tag{19}$$

Equations.(16)-(18) can be solved easily subject to the boundary conditions (19). The exact solution for the velocity of the electrically conducting phase is given by

$$u_1(y_1) = U + k_1 \cosh[M\gamma_1\lambda] + k_2 \sinh[M\gamma_1\lambda]. \tag{20}$$

The corresponding solution for the velocity of the non-conducting fluid is given by

$$u_2(y_2) = k_3 + k_4 y_2 - \frac{G\alpha y_2^2}{2\beta^2}. \tag{21}$$

And the solution for the magnetic field of the electrically conducting phase is given by

$$b(y_1) = \frac{R_m((\cosh[M\lambda] - \cosh[M\lambda y_1])k_2 - k_1(\sinh[M\lambda y_1] - y_1 \sinh[M\lambda]))}{M}. \tag{22}$$

Where

$$\begin{aligned}
 U &= \frac{G}{M^2 \lambda^2} - \frac{R_e}{\lambda}, \\
 M_1 &= 2\beta(M\gamma\lambda \cosh[M\lambda] + \beta \sinh[M\lambda]), \\
 k_1 &= \frac{-2MU\beta\gamma\lambda + (G\alpha - 2U\beta^2)\sinh[M\lambda]}{M_1}, \\
 k_2 &= -\frac{2U\beta^2 + (G\alpha - 2U\beta^2)\cosh[M\lambda]}{M_1}, \\
 k_3 &= \frac{2MU\beta\gamma\lambda(\cosh[M\lambda] - 1) + G\alpha \sinh[M\lambda]}{M_1}, \\
 k_4 &= \frac{M\gamma\lambda(-2U\beta^2 - (G\alpha - 2U\beta^2)\cosh[M\lambda])}{\beta M_1},
 \end{aligned}$$

Temperature distribution

Once the velocity distributions are known the temperature distributions for the two regions are determined by solving the energy equations subject to the appropriate boundary and interface conditions.

In the present problem, it is assumed that the two walls are maintained at constant and equal temperatures.

The term involving $\frac{\partial T}{\partial x}$ in the energy equation (9) drops out for such a condition. The governing equation for the temperature T_1 of the conducting phase-I is then given by

$$k_1 \frac{d^2 T_1}{dy_1^2} + \mu_1 \left(\frac{du_1}{dy_1} \right)^2 + \sigma (E_z + u_1 B_0 \lambda)^2 = 0 \quad (23)$$

The temperature T_2 of the non-conducting fluid in phase-II is similarly governed by the equation

$$k_2 \frac{d^2 T_2}{dy_2^2} + \mu_2 \left(\frac{du_2}{dy_2} \right)^2 = 0 \quad (24)$$

To non-dimensionalize the equations (23) and (24) the following transformations are used

$$u_1^* = \left(\frac{u_1}{u_1} \right), y_1^* = \frac{y_1}{h_1}, u_2^* = \left(\frac{u_2}{u_1} \right), y_2^* = \frac{y_2}{h_2}, G = \frac{P}{(\mu_1 u_1 / h_1^2)},$$

$$R_e = \frac{E_z}{u_1 B_0}, \theta_1 = \frac{T_1 - T_w}{u_1 \mu_1 / k_1}, \theta_2 = \frac{T_2 - T_w}{u_1 \mu_1 / k_1} \quad (25)$$

Here T_w is the common wall temperature. Equations (23) and (24) then reduces to the following form

$$\frac{d^2 \theta_1}{dy_1^2} + \left(\frac{du_1}{dy_1} \right)^2 + M^2 (R_e + \lambda u_1)^2 = 0 \quad (26)$$

$$\frac{d^2 \theta_2}{dy_2^2} + \frac{\gamma}{\alpha} \left(\frac{du_2}{dy_2} \right)^2 = 0 \quad (27)$$

Here γ is the ratio of the thermal conductivities of the two fluids, $\gamma = \frac{k_1}{k_2}$,

α is the ratio of the viscosities of the two fluids, $\alpha = \frac{\mu_1}{\mu_2}$,

M is the non-dimensional Hartmann number, $M = B_0 h_1 \sqrt{\frac{\sigma_1}{\mu_1}}$

In the non-dimensional form, the boundary conditions of the continuity of temperature and heat flux at the interface $y=0$ becomes

$$\theta_1(+1)=0, \quad \theta_2(-1)=0, \quad \theta_1(0)=\theta_2(0),$$

$$\frac{d\theta_1}{dy_1} = \frac{\beta}{\gamma} \left(\frac{d\theta_2}{dy_2} \right)_{\text{at } y=0} \quad (28)$$

In the present case, it is assumed that $T_{w_1} = T_{w_2} = T_w$

Once the velocity distributions are known the temperature distributions for the two phases are determined using equations (26)-(28) and (20)-(21).

The solutions of equations (26) and (27) is given by

$$\theta_1(y_1) = -\frac{1}{4\lambda} (\lambda \cosh[2M\lambda y_1] k_1^2 + \lambda \cosh[2M\lambda y_1] k_2^2 + 8 \sinh[M\lambda y_1] k_2 k_5$$

$$+ 4 \cosh[M\lambda y_1] k_1 (\lambda \sinh[M\lambda y_1] k_2 + 2k_5) - 2\lambda(2k_7 + 2k_8 y_1 - M^2 k_5^2 y_1^2)) \quad (29)$$

$$\theta_2(y_2) = k_9 + k_{10} y_2 - \frac{\gamma k_4^2 y_2^2}{2\alpha} + \frac{G\alpha \gamma k_4 y_2^3}{3\alpha \beta^2} - \frac{G\alpha^2 \gamma y_2^4}{12\alpha \beta^4} \quad (30)$$

Where

$$k_5 = R_e + \lambda U, \quad k_6 = \frac{1}{12\alpha \beta^3 (\beta + \gamma) \lambda}$$

$$k_7 = k_6 (3\alpha \beta^3 \lambda (\beta + \gamma \cosh[2M\lambda]) k_1^2 + 3\alpha \beta^3 \lambda (\beta + \gamma \cosh[2M\lambda]) k_2^2$$

$$+ 24\alpha \beta^3 \gamma (\sinh[M\lambda] - M\lambda) k_2 k_5 + 6\alpha \beta^3 k_1 (\gamma \lambda (\sinh[2M\lambda] - 2M\lambda) k_2$$

$$+ 4(\beta + \gamma \cosh[M\lambda] k_5) + \gamma \lambda (G\alpha^2 + 4G\alpha \beta^2 k_4 + 6\beta^4 k_4^2 + 6M^2 \alpha \beta^3 k_5^2))$$

$$k_8 = k_6 (6\alpha \beta^4 \lambda \sinh[M\lambda]^2 k_1^2 + 6\alpha \beta^4 \lambda \sinh[M\lambda]^2 k_2^2 + 24\alpha \beta^3 (M\gamma \lambda + \beta \sinh[M\lambda]) k_2 k_5$$

$$+ 6\alpha \beta^3 k_1 (\lambda (2M\gamma \lambda + \beta \sinh[2M\lambda]) k_2 + 4\beta (\cosh[M\lambda] - 1) k_5)$$

$$- \lambda (G\alpha^2 \gamma + 4G\alpha \beta^2 \gamma k_4 + 6\beta^4 \gamma k_4^2 - 6M^2 \alpha \beta^4 k_5^2))$$

$$k_9 = \gamma (6\alpha \beta^3 \lambda \sinh[M\lambda]^2 k_1^2 + 6\alpha \beta^3 \lambda \sinh[M\lambda]^2 k_2^2 + 24\alpha \beta^3 (-M\lambda + \sinh[M\lambda]) k_2 k_5$$

$$+ 6\alpha \beta^3 k_1 (\lambda (-2M\lambda + \sinh[2M\lambda]) k_2 + 4(\cosh[M\lambda] - 1) k_5)$$

$$+ \lambda (G\alpha^2 + 4G\alpha \beta^2 k_4 + 6\beta^4 k_4^2 + 6M^2 \alpha \beta^3 k_5^2)) k_6$$

$$k_{10} = -\frac{k_6}{\beta} (\gamma(-6\alpha\beta^4 \lambda \sinh[M\lambda]^2 k_1^2 - 6\alpha\beta^4 \lambda \sinh[M\lambda]^2 k_2^2 - 24\alpha\beta^4 (-M\lambda + \sinh[M\lambda])k_2 k_5 - 6\alpha\beta^4 k_1 (\lambda(-2M\lambda + \sinh[2M\lambda])k_2 + 4(\cosh[M\lambda] - 1)k_5) + \lambda(G\alpha^2 \gamma + 4G\alpha\beta^2 \gamma k_4 + 6\beta^4 \gamma k_4^2 - 6M^2 \alpha \beta^4 k_5^2)))$$

4. Discussion of the results

The velocity and temperature distributions are now plotted graphically against the distances between the two plates. Both the cases are taken in to account, the case of electrical load parameter $R_e = 0$ and $R_e = -1.0$. $R_e = 0$ represents the short circuit case in which there is no electric field, and the flow is driven entirely by the applied pressure gradient. $R_e = -1$ indicates that the Electric pressure drives the flow in opposite direction to the pressure gradient of the fluid. It leads to the retardation of the fluid.



In figure 2 the velocity distribution is plotted against the distances from the solid boundaries. It is clear from the figure 2 for the Phase-I(conducting fluid) at liquid boundary $y = 0$ the fluid velocity $u > 0$ where as at solid boundary $y = 1$ it is zero. This is the evidence that there is an enhancement volumetric flow rate in the channel due to the presence of liquid boundary. This flow rate will be increased when the angle of inclination of imposed magnetic field with vertical line of the channel is increased. This observation is important for the probable application in the pumping of conducting liquid along with the immiscible liquid. This shows that beside the minimizing power requirement for pumping the question of controlling flow rate by changing imposed magnetic field direction. Here some effect is established in fig.4 for different electrical load parameter R_e .



In earlier work [3] it has been pointed out that, the pressure requirement to pump electrically conducting liquid can be reduced. In our paper it has found that the volumetric flow rate in pipe in a channel may be controlled by the orientation of applied magnetic field. The temperature distribution is shown in figure 3 and figure 5. It should be noted that the temperature distributions for the conducting phase in both cases i.e. $R_e = 0$ and $R_e = -1$ have qualitatively the some characteristics as then exhibited by classical one-phase Hartmann flow [8].



The induced magnetic field distribution is shown in figure 6 and figure 7 for ($R_e = 0$ and $R_e = -1$) in conductor strength of magnetic field decreases almost linearly as we approach to the boundary wall of the channel Rate of change of induced magnetic field gradients are strong for the case $R_e = -1.0$ than for the $R_e = 0$.



In figure 8 and figure 9 for ($R_e = 0$ and $R_e = -1$) same effect has been observed as shown in figure 6 and figure 7.

5. Conclusions: The study concerns the magnetohydrodynamics two-phase flow and heat transfer problem in a horizontal channel and it is considered in presence of a uniform inclined magnetic field. The analytical solutions for velocities, induced magnetic field and temperature distributions are obtained and are computed numerically for different heights and viscosity ratios for two fluids and for two values of electric load parameter R_e . Analytical solutions for velocity, induced field and the temperature distributions are obtained; skin frictional factors are computed for different angle of inclinations and for different magnetic field strengths.

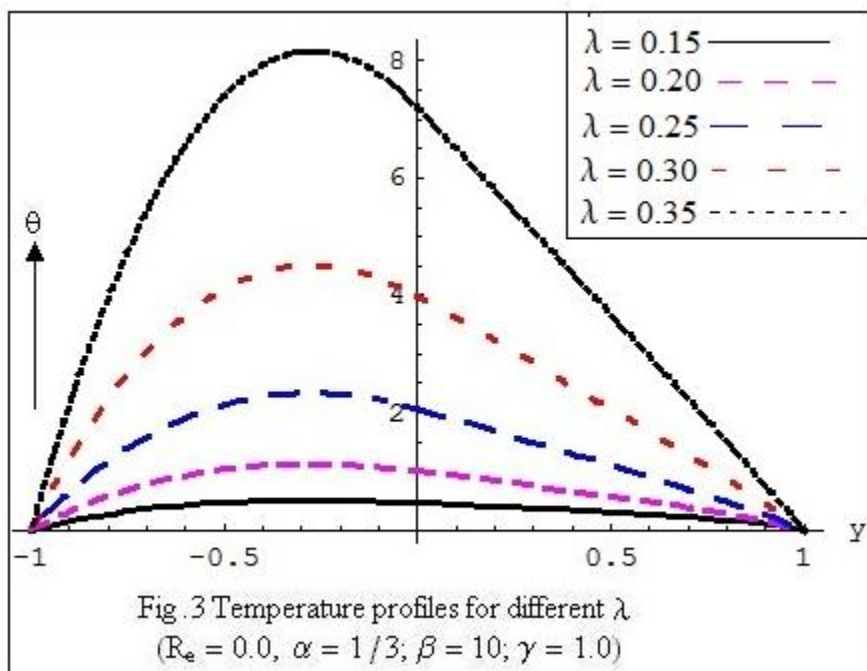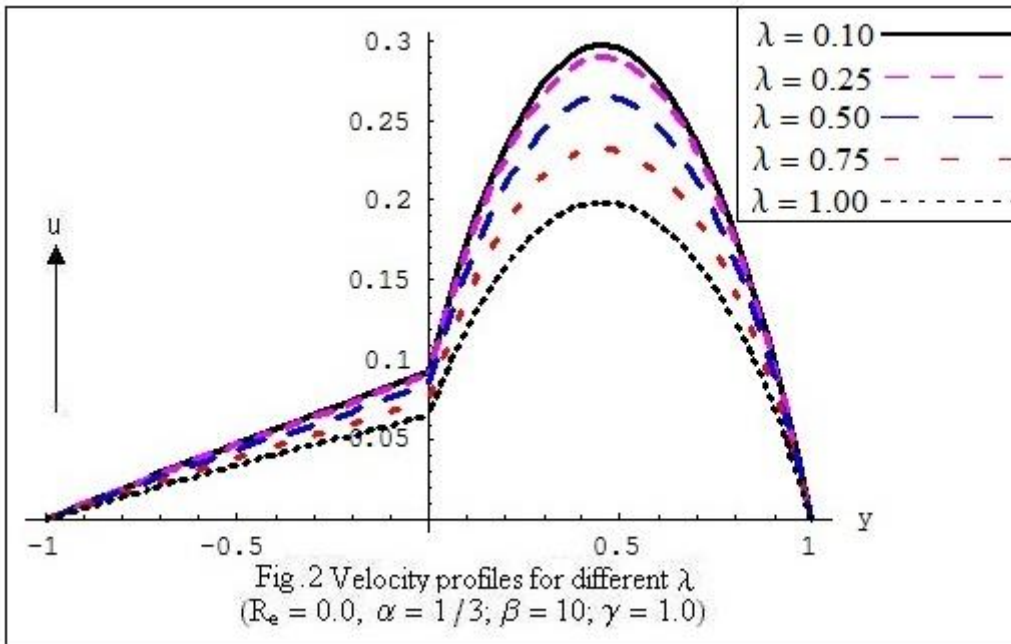

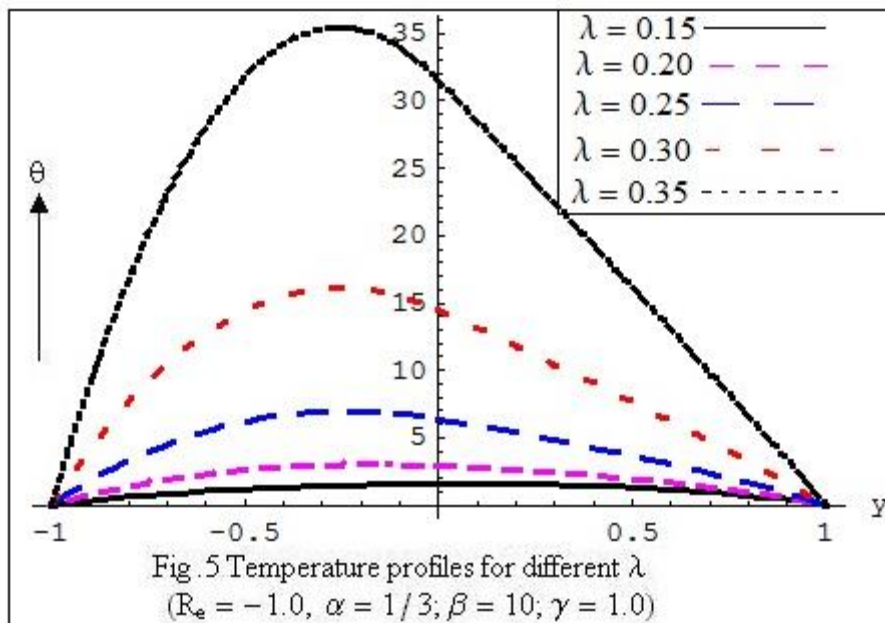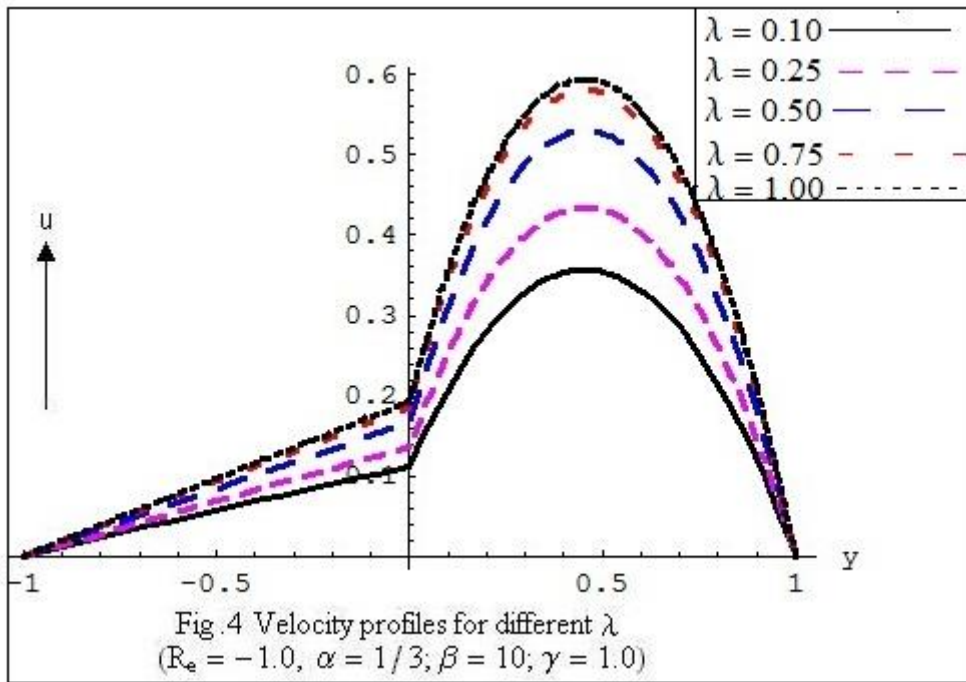

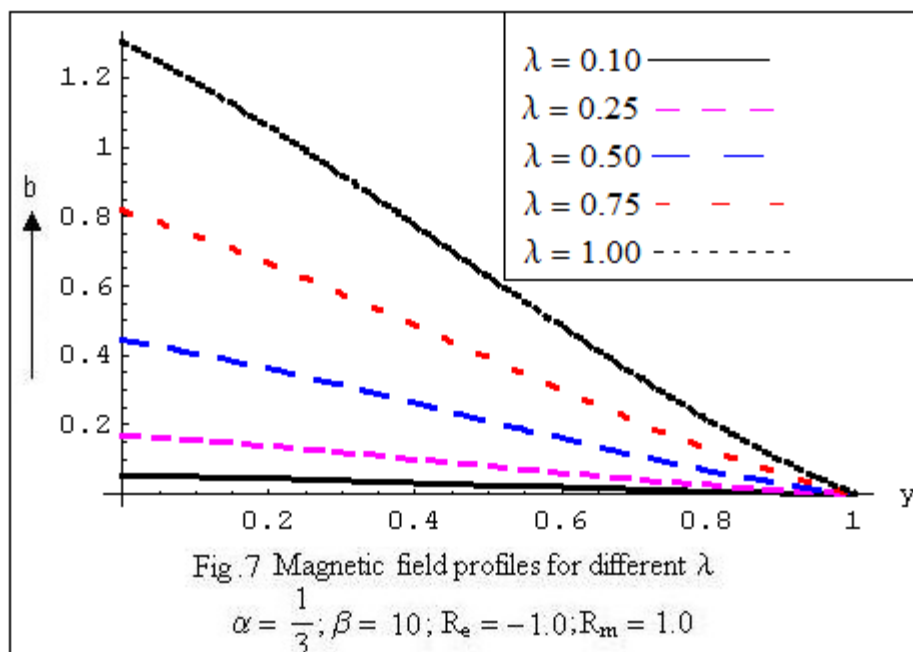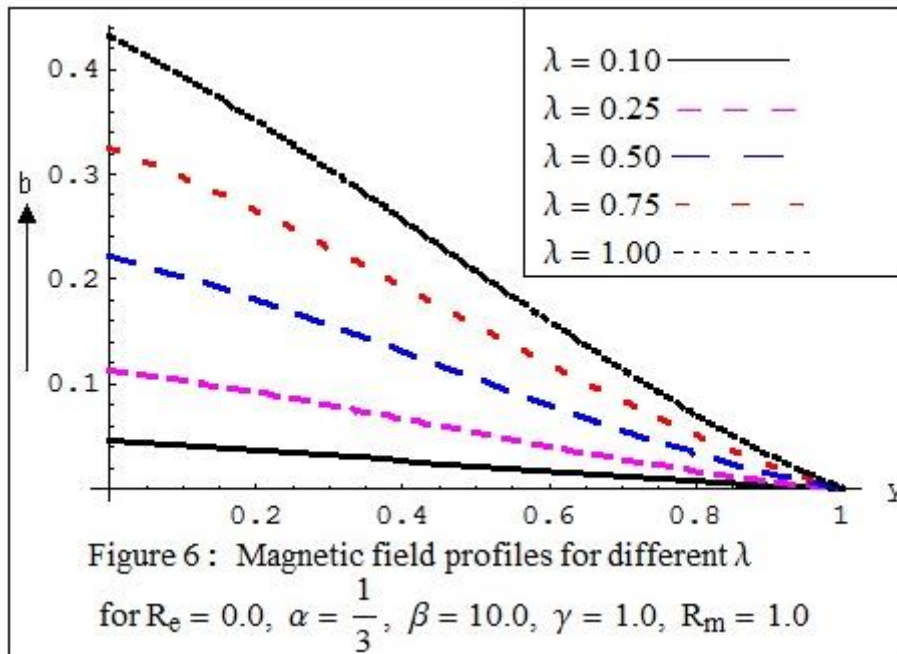

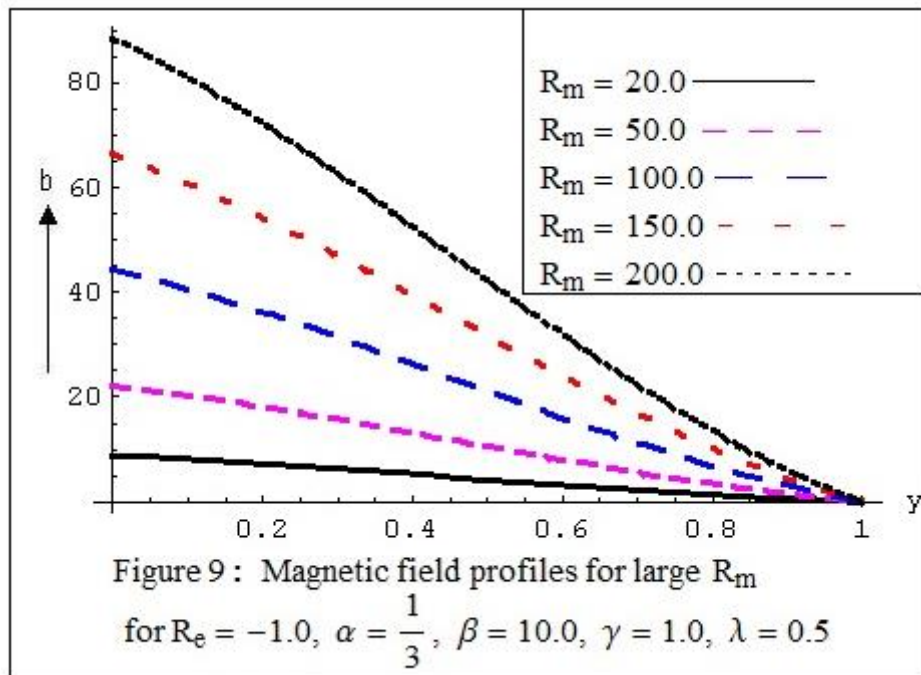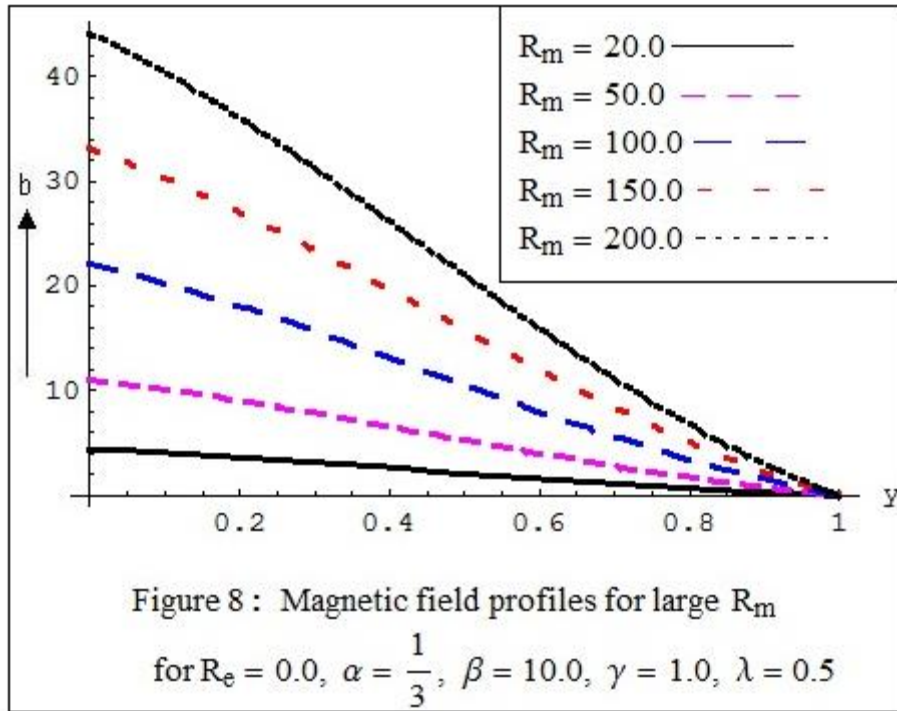

Nomenclature

Greek letters

B_0 Uniform applied magnetic field	$\alpha = \frac{\mu_1}{\mu_2}$, ratio of the viscosities
$B_x(y)$ Induced magnetic field	$\beta = \frac{h_1}{h_2}$, ratio of heights of two fluid
E_z Constant electric field in the direction of z	$\gamma = \frac{k_1}{k_2}$, ratio of the thermal conductivities
h_1, h_2 Heights of the two regions	$\theta_1 = \frac{(T_1 - T_w)}{(u_1 \mu_1 / k_1)}$, non-dimensional temperature in phase-I
$M = B_0 h_1 \sqrt{\frac{\sigma_1}{\mu_1}}$, Hartmann number	
C_p = Specific heat at constant pressure =($Wm^{-1}K^{-1}$)	K =Thermal conductivity = $Jkg^{-1}K^{-1}$
$G = \frac{P}{(\mu_1 u_1 / h_1^2)}$, Non-dimensional Pressure gradient	$\theta_2 = \frac{T_2 - T_w}{u_1 \mu_1 / k_1}$, non-dimensional temperature in phase-II
T_w Common wall temperature	μ_1, μ_2 Viscosities of the two fluids
$R_e = \frac{E_z}{u_1 B_0}$ Electric load parameter	σ_1, σ_2 Electrical conductivity of the two fluids
u_1, u_2 Velocity of the two fluids	
u_1 Average velocity	
x, y, z Co-ordinates in space	Subscripts 1, 2 refer to the upper and lower phase

REFERENCES

- [1]. Alireza, S. and Sahai, V., "Heat transfer in developing magnetohydrodynamic poiseuille flow and variable transport properties, *International Journal of Heat and Mass Transfer*, Vol. 33, No. 8, pp. 1711–1720, 1990.
- [2]. J.Lohrasbi and V.Sahai. Magnetohydrodynamic heat transfer in two-phase flow between parallel plates. *Appl.Sci.Res.*, Vol.45 (1), 53-66 (1988).
- [3]. A.W.Postlethwaite and M.M.Sluyter. MHD Heat Transfer problems – an overview. *ASME, Mechanical Engng.*, 100, 32-39 (1978).
- [4]. M.S.Malashetty and V.Leela. Magnetohydrodynamic heat transfer in two-phase flow. *Int. J. Engng Sci.*, Vol.30 (3), 371-377 (1992).
- [5]. R.Shail. On laminar two-phase flows in magnetohydrodynamics. *Int. J. Engng. Sci.*, Vol.11 (10), 1103-1108 (1973).
- [6]. A.Setayesh and V.Sahai. Heat transfer in developing magnetohydrodynamic Poiseuille flow and variable transport properties. *Int. J. Heat and Mass Transfer*, 33(8), 1711-1720 (1990).
- [7]. M. S. Malashetty and J. C. Umavathi. Two-Phase Magnetohydrodynamic flow and heat transfer in an inclined channel. *Int. J. Multiphase Flow*, Vol. 23, No. 3, 545-560 (1997).
- [8]. K.G. Singha and P. N. Deka. MHD flow and heat transfer between two vertical parallel plates in presence of uniform inclined magnetic field. *Mathematical Forum*, Vol.XVI,25-37 (2003-2004).
- [9]. K.R. Cramer and S.Pai. Magnetofluid dynamics for engineers and applied sciences. McGraw-Hill Book Co., New York (1973).
- [10]. K.G. Singha and P. N. Deka. Two-Phase Magnetohydrodynamic flow and heat transfer in a horizontal channel. *Ganita* Vol.56, No.2,185-201(2005).
- [11] C. Singh, Hydromagnetic steady flow of viscous incompressible fluid between two parallel infinite plates under the influence of inclined magnetic field. *Kenya Journal of Sciences Series A*, vol.12, No 1, 2007.
- [12]. P. Sri Ramachandra Murty and G. Balaji Prakash. MHD Two-Fluid Flow and Heat Transfer between Two Inclined Parallel Plates in a Rotating System. *International Scholarly Research Notices* Vol.2014, 1-11 (2014) .
- [13]. Hasan Nihal Zaidi, Naseem Ahmad. MHD Convection Flow of Two Immiscible Fluids in an Inclined Channel with Heat Generation / Absorption. *American Journal of Applied Mathematics*. Vol. 4, No. 2, pp. 80-91 (2016)

- [14] Navneet kumar Singh, Vinod Kumar and Gaurav Kumar Sharma. The Effect of Inclined Magnetic Field on Unsteady Flow Past on Moving Vertical Plate with Variable Temperature. International Journal of Latest Technology in Engineering, Management & Applied Science. Vol V, Issue II, pp 34-37 (2016)
- [15] Rishab Richard Hanvey , Rajeev Kumar Khare and Ajit Paul. MHD Flow of Incompressible Fluid through Parallel Plates in Inclined Magnetic field having Porous Medium with Heat and Mass Transfer. International Journal of Scientific and Innovative Mathematical Research (IJSIMR) Volume 5, Issue 4, PP 18-22 (2017).
- [16] Aruna Sharma and A.V .Dubewar. MHD Flow between Two Parallel Plates under the Influence of Inclined Magnetic Field by Finite Difference Method. International Journal of Innovative Technology and Exploring Engineering, Vol.8 Issue-12, pp 4106-4111 (2019)
- [17] Thadakamalla Srinivasulu and B. Shankar Goud. Effect of inclined magnetic field on flow, heat and mass transfer of Williamson nanofluid over a stretching sheet. Case Studies in Thermal Engineering pp 1-13(2021)
- [18] R A Mutegi, John Achola Okello and M Kimathi. Analysis of Effect of Inclined Magnetic Field on MHD Boundary Layer Flow over a Porous Exponentially Stretching Sheet Subject to Thermal Radiation. Asian Research Journal of Mathematics 17(9) pp 20-33 (2021)